



Tile Paint

Product Description

Tiles-ceramic, marble, granite, natural stone, concrete etc. It is a UV resistant, chemical and physical resistant, colored coating that can be easily applied on the coating.

Product Advantages

After drying, it forms a hard-elastic and seamless layer.


Tiles-ceramics, marble, granite, natural stone, etc. without incurring large expenses. provides renewal.

Areas of Use

- Decoratively; It can be applied to bathroom, kitchen, balcony, terrace ceramics, all kinds of tiles, marble, granite, porcelain, glass mosaic, concrete, and wooden surfaces such as kitchen cabinets and doors.

Product Feature

- It does not contain solvents.
- Provides strong adhesion to difficult floors such as tiles.
- The final coat appearance is glossy.
- Decoratively, ready-made shapes such as Stencil can be used with templates.
- It has high resistance to water and steam in wet areas such as bathrooms, balconies, terraces and kitchens.
- It is resistant to water and cleaning chemicals.
- Since its surface is shiny and patternless, it can be easily cleaned.
- It can be applied directly without primer.
- Application after Newkim anti-slip solution is recommended.
- It is UV resistant and is not affected by external weather conditions.

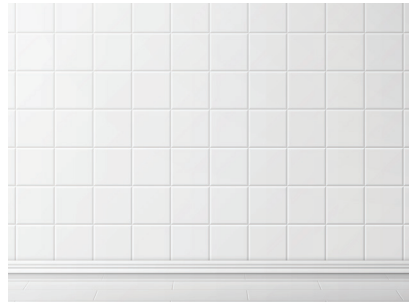

Application

- The surface to be applied must be clean. The surface must be free from all factors that will reduce the adhesion of the paint to the surface, such as dust, dirt, oil and silicone. When necessary, sanding must be done or Newkim anti-slip solution must be applied.
- It does not require the use of any primer before application. In order to prevent corrosion on metal surfaces, it is recommended to prime the surface with Newsan Antirust.
- After the tile paint package is opened, it is mixed until a homogeneous consistency is achieved.
- The product is applied to the pre-prepared surface in 2 layers without diluting, using a silk brush, velvet varnish roller or spraying.
- Min. It should be waited for 2 hours.
- During application, care should be taken to keep the applied surface and ambient temperature between +10°C and +35°C.

NOTE:

It is ready for use. Mix before application.

Touch Dry: 1 - 2 hours.

Final drying: 24 hours.

Applied surfaces should not be used for 1 day, and surfaces exposed to water should not be used for 2 days.

Water accumulation should not be allowed for the first 7 days and it should be protected against impacts.

Consumption & Packaging

0.150-0.200 kg per 1 m²

In 1 lt and 3 lt packages

Shelf Life

It is stable for 2 years at room temperature in its original, unopened package.